



**WELDWRAP**

- Easy To Install - Cuts With Scissors
- Resists Damage from UV, Gasoline & Engine Chemicals
- Weld Splatter, Hot Slag, & Welding Spark Protection
- Stays Flexible In Low Temps

**Put-Ups**

Nominal Size	Part #	Velcro Width	Bulk Spool	Shop Spool	Retail	Bag	Available Colors	Lbs/100'
1"	WWN1.00BK	0.84"	150'	50'	25'	10'	Black	8.4
1 1/2"	WWN1.50BK	0.84"	150'	50'	25'	10'	Black	11.0
2"	WWN2.00BK	1.55"	150'	50'	25'	10'	Black	13.8
2 3/8"	WWN2.38BK	1.55"	150'	50'	25'	10'	Black	14.8
2 3/4"	WWN2.75BK	1.55"	150'	50'	25'	10'	Black	16.4
3"	WWN3.00BK	1.55"	150'	50'	25'	10'	Black	18.4
3 1/4"	WWN3.25BK	1.55"	150'	50'	25'	10'	Black	19.2
3 1/2"	WWN3.50BK	1.55"	150'	50'	25'	10'	Black	20.4
4"	WWN4.00BK	1.55"	150'	50'	25'	10'	Black	21.7




**Cut Cleanly**  
**Scissors**

**Protects Vulnerable Welding Hoses From Catastrophic Failure.**

Techflex WeldWrap (WW) is braided from fiberglass yarns with high temperature coating and velcro closure. Commonly used for protecting welding hoses against flame and abrasion, when dragging weld slag across the floor. This product will withstand continuous exposure to temperatures of 400°F/204.4°C, and intermittent introduction to temperatures of 750°F/399°C.

The heavy duty hook and loop closure ensures a tight seal and allows WeldWrap to be installed easily over existing assemblies. WeldWrap also provides a high level of abrasion and penetration protection to increase the useful life of any hoses exposed to rough or abrasive surfaces.

- Colors Available:  
 Black (BK)

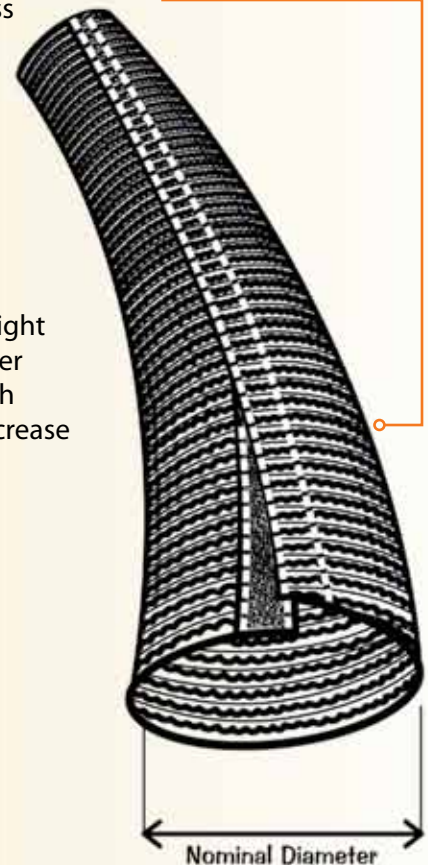

...bundles and protects hoses and cables on welding robots and static welding stations.

**Material**  
 Fiberglass

**Grade**  
 WWN

**Wall Thickness**  
 .04"





# WELDWRAP



**Abrasion Resistance**  
**High**

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Room Temperature**  
**77°F**

**Humidity**  
**70%**

**Material Destroyed -**  
**Two Small Holes Worn**  
**Through**  
**1,060 Test Cycles**

**Pre-Test Weight**  
**7,857.40 mg**

**Post-Test Weight**  
**6,602.20 mg**

**Test End Loss Of Mass**  
**Point Of Destruction**  
**1,255.20 mg**



Rating \_\_\_\_\_ Non Flammable



## Chemical Resistance


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Keytones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1

**Intermittent Exposure**  
**750°F (399°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**400°F (204.4°C)**

**Minimum Continuous**  
**-40°F (-40°C)**

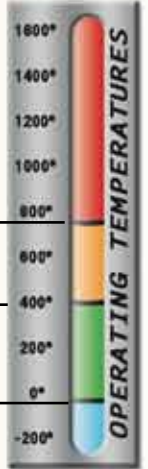

## PHYSICAL PROPERTIES

**Monofilament Diameter** \_\_\_\_\_ **NA**  
*ASTM D-204*

**Flammability Rating** \_\_\_\_\_ **VW-1**  
*FMVSS-302 Approved*

**Recommended Cutting** \_\_\_\_\_ **Scissor/Shears**

**Colors** \_\_\_\_\_ **1**

**Wall Thickness** \_\_\_\_\_ **.04**